

Please type a plus sign (+) inside this box ☐

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

PPC-691

First Named Inventor or Application Identifier

Bruce C. Johnson et al.

Express Mail Label No.

EL190925645US

APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (attached hereto in duplicate)
2. ☒ Specification [Total Pages 45]
(Preferred arrangement set forth below)
 - Descriptive Title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R&D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 1]
4. Oath or Declaration
 - a. ☐ Newly executed (original or copy)
 - b. ☒ Unexecuted original
 - c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional check boxes 5 and 16)
 - i. ☐ Deletion of Inventor(s)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference
(useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4c, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

15. ☐ Other:

16. ☐ If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
Amend the specification by inserting before the first line: -- This is a ☐ Continuation ☐ Divisional
☐ Continuation-in-Part (CIP) of prior application No.: , filed , --
of the prior application before calculating the filing fee.
17. For this divisional application, please cancel original Claims

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label or ☒ Correspondence Address below

Name: Audley A. Ciamporzero, Jr., Esq.
Address: Johnson & Johnson
One Johnson & Johnson Plaza
New Brunswick, NJ 08933-7003 USA

19. TELEPHONE CONTACT

Please direct all telephone calls or telefaxes to Joel A. Rothfus at:
Telephone: (732) 524-2722 Fax: (732) 524-2808

19. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME Joel A. Rothfus Reg. No. 33,277

SIGNATURE

DATE

June 30, 1999

**Multilayered Apertured Film Wrapping Element
for Absorbent Articles**

Cross Reference to Related Applications

5 This invention is related to the following
copen pending applications: US Ser. No. _____, filed
June __, 1999, entitled "Continuous Method of Providing
Individual Sheets from a Continuous Web" (Attorney
Docket, PPC-668); US Ser. No. _____, filed June __,
10 1999, entitled "Tampon with Cover and Nonionic
Surfactant" (Attorney Docket, PPC-708); US Ser. No.
_____, filed June __, 1999, entitled "Heterogeneous
Apertured Film Wrapping Element for Absorbent Articles"
(Attorney Docket, PPC-713); US Ser. No. _____, filed
15 June __, 1999, entitled "Domed Tampon with Surfactant-
Treated Cover" (Attorney Docket, J&J-1810); US Ser. No.
_____, filed June __, 1999, entitled "Sealing Roller
and Sealing Roller Element, Particularly for Producing a
Tampon for Feminine Hygiene and Method Therefore"
20 (Attorney Docket, J&J-1819); and US Ser. No. _____,
filed June __, 1999, entitled "Tampon for Feminine
Hygiene and Process and Apparatus for its Production"
(Attorney Docket, J&J-1820).

25 **Background of the Invention**

 The present invention relates to a multilayered
apertured film wrapping element for an absorbent
article. At least one outer layer of the fluid-

____ Express Mail #EL190925645US ____
____ Date Mailed: June 30, 1999 ____

impervious plastic material has a continuous phase of a thermoplastic polymeric component and an immiscible, dispersed phase of a thermoplastic polymeric component having a lower melting point. The wrapping element is useful in applications involving heat sealing and similar thermal processes in absorbent articles, such as sanitary napkins, diapers, bandages, tampons, and the like.

There are several types of wrapping elements, including covers, that have been or are currently in use for absorbent articles: woven fabrics, nonwoven fabrics, apertured films, reticulated films, polymer nets, and the like. There has been a progression from woven fabrics to nonwoven fabrics and apertured films in these covers. These covers are often adhesively attached to other components in the absorbent article. An adhesive may be applied as a separate component between the cover and another component, or adhesion may result from "heat sealing" or heating one of the components to cause it to become adhesive.

Nonwoven fabrics may incorporate multicomponent fibers having at least two different melting points. Then these fabrics may be adhered to an absorbent article, such as a tampon, as described in Friese, U.S. Patent Nos. 4,816,100; 4,836,450; and 4,859,273. This is one example of heat sealing a wrapping element or cover.

It may also be desirable to heat seal an apertured film. While it may be possible to heat seal an apertured film that is formed of only one component, this is generally only in areas where it is acceptable or even desirable that the apertures in the film become closed. However, heat sealing an apertured film to an underlying fibrous structure in a manner that maintains open apertures in the heat sealing area is more complex, and it generally requires the use of a film material having at least two different components having at least two different melting point temperatures. An example of this is described in Thompson et al., U.S. Patent No. 5,342,334. In this example, the apertured film is formed from a co-extruded film having a higher melting point polymeric material on a first, non-bonded surface, and a lower melting point polymeric material on a second, heat-bondable surface. Unfortunately, this arrangement provides a large surface area of bondable material on the second surface, and it may allow unwanted or overly aggressive adhesion in the manufacturing process or final product. The film may adhere to process equipment, such as the apertured film forming surfaces and heat sealing elements. In addition, both layers of the film are exposed to process equipment.

Therefore, what is needed is an apertured film that is heat sealable in a controlled manner, that maintains open apertures, that separates at least one intermediate

layer of the film from process equipment to protect both the layer and the equipment from damage, and that allows improved balance of film properties over a monolayer or bilayer film.

5

Summary of the Invention

10 The present invention relates to a wrapping element useful in absorbent articles. The wrapping element is formed of a fluid-impervious plastic material in the form of a resilient three-dimensional web exhibiting a fiber-like appearance and tactile impression. The fluid-impervious plastic material is formed of a laminate having at least three layers: a first layer, forming a first outer surface of the laminate; a second layer forming a second outer surface of the laminate, opposite the first outer surface; and at least one intermediate layer, disposed between the first and second layers. The first layer has a blend of at least two thermoplastic polymeric components, a continuous phase of a first thermoplastic polymeric component that exhibits a first melting point temperature and a dispersed phase of an immiscible, second thermoplastic polymeric component that exhibits a second melting point temperature, less than the first melting point temperature. Therefore, that when the web is heated to a temperature between the first melting point temperature and the second melting point temperature, the second thermoplastic polymeric component is capable

15

20

25

of forming an adhesive bond. The web has first and second surfaces. The first surface is defined at least in part by the either of the first and second layers, and it has a multiplicity of apertures therein. The apertures are defined by a multiplicity of intersecting fiber-like elements interconnected to one another substantially in the plane of the first surface. Each of the fiber-like elements exhibits a cross-section having a base portion in the plane of the first surface and a sidewall portion joined to each edge of the base portion. The sidewall portions extend generally in the direction of the second surface of the web, and the intersecting sidewall portions are interconnected to one another intermediate the first and the second surfaces of the web. The interconnected sidewall portions terminate substantially concurrently with one another in the plane of the second surface. In another aspect, the invention relates to a tampon having an absorbent structure substantially enclosed by the wrapping element.

The invention also relates to a method of forming a wrapping element useful in absorbent articles. The method includes the steps of forming a laminate having at least three layers, applying fluid at a temperature greater than ambient temperature to the laminate while it is supported on a three-dimensional surface to form a resilient three-dimensional web, and separating the web

into individual pieces of material of a size appropriate for a wrapping element.

Again, the web has first and second surfaces, and the first surface is defined at least in part by the
5 either of the first and second layers and having a multiplicity of apertures therein. Each of the apertures is defined by a multiplicity of intersecting fiber-like elements interconnected to one another substantially in the plane of the first surface, and
10 each of the fiber-like elements exhibits a cross-section comprising a base portion in the plane of the first surface and a sidewall portion joined to each edge of the base portion. The sidewall portions extend generally in the direction of the second surface of the web, and the intersecting sidewall portions are
15 interconnected to one another intermediate the first and the second surfaces of the web. The interconnected sidewall portions terminate substantially concurrently with one another in the plane of the second surface. The laminate is substantially as described above.
20

Finally, the invention also relates to a method of making a tampon. The method includes separating a cover from a supply of a resilient three-dimensional web such as that described above, substantially enclosing an
25 absorbent structure with the cover, and applying thermal energy to the cover to heat it to a temperature between the first melting point temperature and the second

melting point temperature of the first layer to form an adhesive bond.

Brief Description of the Drawing

5 Fig. 1 is a tampon having an apertured film cover according to the present invention.

 Fig. 2 is an enlarged cross-section of an apertured film according to the present invention.

10 Fig. 3 is an enlarged cross-section of an alternative embodiment of the apertured film of the present invention.

Detailed Description of the Preferred Embodiment

15 As used herein, the term "absorbent article" refers to devices that absorb and contain body exudates and that are worn on or inside the body. These devices preferably absorb and contain blood, urine, and/or vaginal discharges, such as bandages, dental and nasal tampons, diapers, sanitary napkins, incontinence guards or pads, interlabial sanitary protection devices, and
20 internal sanitary protection devices such as tampons.

 As used herein, the term "apertured film" refers to a fluid-impervious plastic material in the form of a resilient three-dimensional web having first and second
25 surfaces and exhibiting a fiber-like appearance and tactile impression. The first surface of the three-dimensional web has a multiplicity of apertures therein.

 Preferably, each of the apertures is defined by a

5 multiplicity of intersecting, fiber-like elements
interconnected to one another substantially in the plane
of the first surface. Each of the fiber-like elements
exhibits a cross-section, preferably having a base
portion in the plane of the first surface and a sidewall
10 joined to each edge of the base portion. The sidewall
portions extend generally in the direction of the second
surface of the three-dimensional web. Further, the
intersecting sidewall portions are interconnected to one
another intermediate the first and second surfaces of
the web. The interconnected sidewall portions
preferably terminate substantially concurrently with one
another in the plane of the second surface.

15 As used herein, the term "wrapping element" refers
to an element of an absorbent article that, alone or in
conjunction with one or more additional element(s),
substantially encloses an absorbent structure. As used
herein, the term "cover" refers to a wrapping element
located on the outer surface of an absorbent article.

20 The absorbent articles of the present invention,
e.g., a tampon 10, comprise an apertured film wrapping
element, e.g., a cover 12, and an absorbent structure
14. The wrapping element at least partially encloses
the absorbent structure that is generally designed and
25 constructed to absorb and contain bodily exudates

As indicated above, the presence of the sidewalls
16 between the first surface 18 and second surface 20 of
the web imparts a generally three-dimensional quality to

the wrapping element. This three-dimensional quality is distinct from the generally two-dimensional quality of a reticulated film, such as that described in U.S. Patent No. 4,710,186, the disclosure of which is hereby
5 incorporated by reference. Two-dimensional reticulated films more readily allow portions of the absorbent materials of the absorbent structure to protrude through to the surface of the absorbent article, such as a tampon.

10 The three-dimensional quality provided by the sidewalls 16 helps to separate the absorbent materials of the absorbent structure 14 from the surface of the absorbent article, often defined by the first surface 18 of the wrapping element 12. The longer the sidewalls
15 16, the greater the separation of the absorbent structure materials from the article surface and the less likely it is that any absorbent structure materials will protrude through the openings 22 in the apertured film 12 to contact the user's body tissues during use.

20 Some types of absorbent materials may protrude more easily through the openings 22 in the apertured film 12, and thus, longer sidewalls 16 may be needed to prevent protrusion. It will be recognized by those familiar in the art that tampons 10 are often compressed during the
25 manufacturing process. Such compression may cause the sidewalls 16 of the apertured film 12 to fold over. Such folding, however, does not appear to detract from the ability of the sidewalls 16 to prevent protrusion of

the absorbent materials through the openings 22 in the apertured film 12.

Fig. 2 is an enlarged cross-section of a wrapping element, e.g., cover 12, according to the present invention. The wrapping element is a web having first surface 18 and second surface 20. As can be seen in this figure, the web is preferably comprised of a laminate having a plurality of layers: a first layer 24, a second layer 26, and an intermediate layer 28 disposed therebetween. Although only one intermediate layer 28 is illustrated in this Fig. 2, it will be apparent to one of ordinary skill that additional intermediate layers (e.g., second intermediate layer 28A in Fig. 3) may also be added.

The first layer forms a first outer surface of the laminate. This layer is formed of a blend of at least two thermoplastic polymeric components. The first thermoplastic polymeric component forms a continuous phase that exhibits a first melting point temperature. In order to form the continuous phase, it is preferred that the first thermoplastic polymeric component be present at about 45 to about 95 wt-% of the layer, more preferably about 60 to about 80 wt-% of the layer. A dispersed phase comprises a second thermoplastic polymeric component that exhibits a second melting point temperature. It is preferred that the second thermoplastic polymeric component is present at about 55 to about 5 wt-% of the layer, more preferably about 40

to about 20 wt-% of the layer. In addition, the second melting point temperature is sufficiently less than the first melting point temperature to allow the film to be heated to a temperature between the first and second melting point temperatures, rendering the second thermoplastic polymeric component capable of forming an adhesive bond. This bond may be formed between different portions of the wrapping element, or it may be between the wrapping element and another element of the absorbent article. Preferably, the difference between the first melting point temperature and the second melting point temperature is greater than about 20° C, and more preferably, the difference between the first melting point temperature is greater than about 30° C. Most preferably, the difference is greater than about 40° C.

The continuous phase provides the "backbone" of the layer and contributes most of the layer's mechanical properties, such as tensile strength, stiffness, elongation at break, coefficient of friction, modulus, and the like. The first thermoplastic polymeric component substantially provides these properties. Therefore, the first thermoplastic polymeric component of the first layer will be chosen for its desirable properties. A representative, non-limiting list of suitable polymers for the first thermoplastic polymeric component includes polyolefins, such as polypropylene and polyethylene; polyolefin copolymers, such as

ethylene-vinyl acetate ("EVA"), ethylene-propylene, ethylene-acrylates, and ethylene-acrylic acid and salts thereof; halogenated polymers; polyesters and polyester copolymers; polyamides and polyamide copolymers; polyurethanes and polyurethane copolymers; polystyrenes and polystyrene copolymers; and the like. Preferred first thermoplastic polymeric components include polyolefins, especially polypropylene.

The dispersed phase provides localized areas for thermal bonding to adjacent elements. The second thermoplastic polymeric component provides these properties, and it may also contribute to some of the mechanical properties, including coefficient of friction. A representative, non-limiting list of suitable polymers for the second thermoplastic polymeric component includes polyolefins, such as polypropylene and polyethylene; polyolefin copolymers, such as ethylene-vinyl acetate ("EVA"), ethylene-propylene, ethylene-acrylates, and ethylene-acrylic acid and salts thereof; halogenated polymers; polyesters and polyester copolymers; polyamides and polyamide copolymers; polyurethanes and polyurethane copolymers; polystyrenes and polystyrene copolymers; and the like. Preferred second thermoplastic polymeric components include polyethylene and its copolymers, especially linear low density polyethylene (LLDPE), low density polyethylene (LDPE) and EVA.

The first and second thermoplastic polymeric components of the first layer should be selected to allow the desired properties of each material to be apparent. For example, a combination of polypropylene (continuous phase) and polyethylene (dispersed phase) employs thermoplastic polymeric components that have a viable melting point differential to allow for heat sealing and that are compatible, e.g., they can be extruded from the same extrusion head without charring, etc. In contrast, a combination of LLDPE (continuous phase) and LDPE (dispersed phase) would be less desirable, because there is insufficient melting point differential to provide for acceptable heat sealing. Additionally, a combination of nylon-6 (continuous phase) and EVA (dispersed phase) would also be less desirable as the dispersed phase is likely to be degraded in a film extrusion process.

In addition, other components and further additives can be added to the first layer in an amount that will not hinder obtaining the object of the present invention, including, without limitation, antioxidants, UV absorbers, lubricants, antiblock and slip agents, plasticizers, nucleating agents, antistatic agents, flame retardants, pigments, dyes, and inorganic or organic fillers.

The second layer forms a second outer surface of the laminate, opposite the first outer surface. This layer may have fewer restrictions than the first layer.

It may have only one component, or it may also be a blend of at least two components. If a blend is chosen, it may be homogeneous, or it may be a blend of at least two immiscible polymeric materials. A representative, non-limiting list of suitable polymers for the second layer includes polyolefins, such as polypropylene and polyethylene; polyolefin copolymers, such as ethylene-vinyl acetate ("EVA"), ethylene-propylene, ethylene-acrylates, and ethylene-acrylic acid and salts thereof; halogenated polymers; polyesters and polyester copolymers; polyamides and polyamide copolymers; polyurethanes and polyurethane copolymers; polystyrenes and polystyrene copolymers; and the like; or combinations thereof. However, the second layer may also include other polymers, including a discrete phase comprising thermoset polymers.

In addition, other components and further additives can be added to the second layer in an amount that will not hinder obtaining the object of the present invention, including, without limitation, antioxidants, UV absorbers, lubricants, antiblock and slip agents, plasticizers, nucleating agents, antistatic agents, flame retardants, pigments, dyes, and inorganic or organic fillers.

In a preferred embodiment, the second layer of the wrapping element has the characteristics described above for the first layer. It may be the same as or different than the first layer. Preferably, the first and second

layers are substantially identical to enable a single extruder to form both layers.

At least one intermediate layer is disposed between the first and second layers to contribute additional, desirable properties to the wrapping element. For example, the at least one intermediate layer (otherwise described as "intermediate layer(s)") may have an elevated loading of pigment to increase the opacity of the wrapping element. If pigments are loaded in a monolayered film at levels that are too high, the additives may "plate out" of the film, creating poorer appearance and clogging and/or abrading processing equipment. However, elevated loading of pigments in an intermediate layer is less likely to cause the same extent of the problems likely caused if this loading exists in an outer layer or monolayer. Therefore, it is possible to have pigment loading in excess of 10 wt-% in the intermediate layer, preferably, about 1 to about 10 wt-%, and most preferably, about 8 to about 10 wt-% pigment in the intermediate layer. This pigment loading, in combination with some pigment loading in the first and/or second layers may result in films having a pigment loading in excess of about 5 wt-%, preferably, about 5 to about 8 wt-%, and most preferably, an overall pigment loading in the film of about 6 to about 7 wt-%.

In addition, the intermediate layer(s) may comprise polymeric materials that are softer, tackier, more ductile, and have a lower modulus, etc., than the

materials in the outer two layers. This can result in a wrapping element that has improved softness and drape. In contrast, using the same polymeric materials in a monolayer film may increase the likelihood that the film will stick to process equipment surfaces or to itself, may increase the tackiness of the film, or may cause the film to be too limp. It may also reduce the ability of the film to form the desired apertures.

Further, the intermediate layer(s) may comprise polymeric materials that are stiffer, than the materials in the outer two layers. This can result in a more defined apertured web that better maintains its three-dimensional characteristics. Again, using these polymeric materials in a monolayer film may reduce the tendency of the aperturing process to form desirable apertures. Other useful variations in the intermediate layer(s) will be apparent to those of ordinary skill in the art.

The intermediate layer(s) may be formed of a single thermoplastic polymeric material, or it may be formed of at least one blend of at least two immiscible polymeric materials. A representative, non-limiting list of polymeric materials that may be used in the intermediate layer(s) includes polyolefins, such as polypropylene and polyethylene; polyolefin copolymers, such as ethylene-vinyl acetate ("EVA"), ethylene-propylene, ethylene-acrylates, and ethylene-acrylic acid and salts thereof; halogenated polymers; polyesters and polyester

copolymers; polyamides and polyamide copolymers;
polyurethanes and polyurethane copolymers; polystyrenes
and polystyrene copolymers; and the like. Preferred
intermediate layer polymeric materials include
5 polyolefins, especially polypropylene, and ethylene
copolymers, especially EVA.

If the intermediate layer(s) is formed of a blend,
it is preferred that the first thermoplastic polymeric
component of the intermediate layer(s) represents about
10 45 to about 99 wt-% of the film and forms a continuous
phase. One or more additional polymeric materials of
the intermediate layer(s) may then form one or more
dispersed phase within the continuous phase. Again, the
first and second thermoplastic polymeric components of a
15 blended intermediate layer should be selected to allow
the desired properties of each material to be apparent.

Again, other components and further additives can be
added to the intermediate layer(s) in an amount that will
not hinder obtaining the object of the present invention,
20 including, without limitation, antioxidants, UV
absorbers, lubricants, antiblock and slip agents,
plasticizers, nucleating agents, antistatic agents, flame
retardants, pigments, dyes, and inorganic or organic
fillers.

25 It is also necessary to use care in selecting the
appropriate individual layers of the laminate. They
should be selected to provide appropriate laminate
integrity. This integrity relates to effectiveness

during heat sealing, resistance to degradation under processing conditions, etc. For example, the following combinations of laminate layers have been found to be acceptable: Polypropylene/polyethylene (first and second layers) with polyethylene/EVA (intermediate layer) and LLDPE/LDPE (first and second layers) with LDPE/high density polyethylene ("HDPE") (intermediate layer). In contrast, a combination of nylon-6 and HDPE would be less desirable, because the laminate layers are likely to separate.

The absorbent structure may be any absorbent means that is capable of absorbing and/or retaining liquids (e.g., menses and/or urine). The absorbent structure can be manufactured in a wide variety of sizes and shapes and from a wide variety of liquid-absorbing materials. A representative, non-limiting list of useful materials includes cellulosic materials, such as rayon, cotton, wood pulp, creped cellulose wadding, tissue wraps and laminates, peat moss, and chemically stiffened, modified, or cross-linked cellulosic fibers; synthetic materials, such as polyester fibers, polyolefin fibers, absorbent foams, absorbent sponges, superabsorbent polymers, absorbent gelling materials; formed fibers, such as capillary channel fibers and multilimbed fibers; combinations of materials, such as synthetic fibers and wood pulp including coformed fibrous structures (e.g., those materials described in Anderson et al., U.S. Patent No. 4,100,324); or any

equivalent material or combinations of materials, or mixtures of these.

5 The wrapping element of the present invention can be manufactured by standard processes known to those of ordinary skill in the art. For example, the base film that is to be apertured can be extruded through multiple extruders to form the three-layered co-extruded film. Additional extruder heads may be added to form additional layers in the laminated film. This technology is well known to those of ordinary skill in the art. The base film can then be apertured by any of the known processes. Several examples include hot air aperturing, and water jet aperturing. Examples of these process are disclosed in Curro, US Pat. No. 4,695,422; 10 Turi, US Pat. No. 5,567,376; and Mullane, US Pat. No. 4,741,877. The resulting multilayered apertured film can be coated, for example as described in commonly assigned, co-pending application US Ser. No., _____, filed June __, 1999, entitled "Tampon with Cover and Nonionic Surfactant" (Attorney Docket PPC-708), and/or 20 slit to a desired width for use in manufacturing an absorbent

A preferred embodiment of the present invention is a tampon 10 having an apertured film cover 12 25 substantially enclosing an absorbent structure 14. The cover 12 is useful to contain the absorbent structure materials to reduce, preferably prevent, the likelihood that any significant portion of the absorbent structure

14 will escape from the tampon 10 and remain after the
tampon 10 has been removed, e.g., by pulling on the
withdrawal string 30. The cover 12 can also protect the
tissue in contact with the tampon 10 from excessive
friction or other irritation during insertion, use, and
removal of the tampon 10. Further, the cover 12 can add
aesthetic qualities to the tampon 10. Therefore, it is
desirable that the cover 12 have the following
properties low coefficient of friction, smooth surface,
high opacity, clear apertures, and unmelted appearance.

In addition, because the cover 12 contains the
absorbent structure 14, and because it is often
desirable that the cover 12 and absorbent structure 14
be secured to each other, the cover 12 should be capable
of thermally bonding at least to itself in a manner that
secures the absorbent structure 14 within it.
Preferably, the cover 12 is also capable of thermally
bonding to the outer portions of the absorbent structure
14, itself. These thermal bonding processes

One method of applying the apertured film cover
material to an absorbent structure in the manufacture of
a tampon is the use of a cut-and-place unit to cut the
material from the slit roll and to place it on the
absorbent structure. Another method is generally
described in Friese, U.S. Patent No. 4,816,100, the
disclosure of which is herein incorporated by reference.

While this describes the use of a nonwoven cover to a
tampon, improvements necessary to achieve this are

described in the commonly-assigned, copending application, US Ser. No. _____, filed June __, 1999, entitled "Continuous Method of Providing Individual Sheets from a Continuous Web" (Attorney Docket PPC-668), the disclosure of which is herein incorporated by reference. This copending application discloses a method to achieve the total separation of a section of material comprises the following steps: severing a supply material in a plurality of discrete regions along a transverse axis, scoring the material residing between the severed regions along the same transverse axis, and then applying a force sufficient to fracture the scored regions, thereby separating the section of material from its supply.

It is in the latter process that the present invention is particularly useful. In this process, an intermediate layer comprising a relatively low modulus or low ductility material can reduce uncontrolled movement of the cover material as it is perforated, scored, and stretched to form a separated segment of cover material. Particularly desirable cover material that is useful in such a process is one that incorporates a low modulus polymeric material in the intermediate layer(s). A representative, non-limiting list of such materials includes ethylene copolymers, such as ethylene-vinyl acetate ("EVA"), ethylene-propylene, ethylene-ethyl acrylate, and ethylene-acrylic acid; and the like.

Example

Two polymeric blends were coextruded through multiple extruders. The two melt streams entered a feed block that split the outside layer polymer blend into two streams, leaving the intermediate layer intact. The outer layers thus enclosed or "sandwiched" the intermediate layer to produce an A-B-A film. 50 wt-% of the film was an immiscible blend of polypropylene and low density polyethylene ("LDPE") evenly distributed in the two A layers, and 50 wt-% of the film was an immiscible blend of linear low density polyethylene ("LLDPE") and ethylene-vinyl acetate copolymer (8 wt-% vinyl acetate) in the intermediate B layer. The A layers were formed of 70 wt-% of the polypropylene in the continuous phase and 30 wt-% of the LDPE in the dispersed phase. This film was provided as P18-3964 by Clopay Plastic Products Company, Inc., of Cincinnati, Ohio, USA, and it had an average basis weight of 20 gsm, a nominal thickness of 8 mils (0.2 mm), and a titanium dioxide pigment loading of about 6.5 wt-%.

The A-B-A film was then apertured by applying jets of hot air and vacuum at about 330 °C while being supported by a cylindrical forming surface substantially as described in James et al., US Pat. No. 5,916,462, and Zimmerli, US Pat. No. 3,054,148. The differences between the disclosures therein and the process used herein would not be expected to change the results

described hereinbelow. The resulting apertured film had a repeating pattern of substantially uniform, round apertures having a diameter of about 0.62 mm, an open area of about 26%, and an equivalent hydraulic diameter ("EHD"), as measured by the formula $EHD = 4 \times \text{area/perimeter}$, of about 26 mils (0.65 mm).

Open area may be determined by using image analysis to measure the relative percentages of apertured and unapertured, or land, areas. Essentially image analysis converts an optical image from a light microscope into an electronic signal suitable for processing. An electronic beam scans the image, line-by-line. As each line is scanned, an output signal changes according to illumination. White areas produce a relatively high voltage and black areas a relatively low voltage. An image of the apertured formed film is produced and, in that image, the holes are white, while the solid areas of thermoplastic material are at various levels of gray.

The more dense the solid area, the darker the gray area produced. Each line of the image that is measured is divided into sampling points or pixels. The following equipment can be used to carry out the analysis described above: a Quantimet Q520 Image Analyzer (with v. 5.02B software and Grey Store Option), sold by LEICA/Cambridge Instruments Ltd., in conjunction with an Olympus SZH Microscope with a transmitted light base, a plan 1.0x objective, and a 2.50x eyepiece. The image can be produced with a DAGE MTI CCD72 video camera.

A representative piece of each material to be analyzed is placed on the microscope stage and sharply imaged on the video screen at a microscope zoom setting of 10x. the open area is determined from field measurements of representative areas. The Quantimet program output reports mean value and standard deviation for each sample.

EHD was measured according to the procedure disclosed in Turi et al., US Pat. No. 5,567,376. However, the image was acquired using a ScanJet 4c scanner from Hewlett-Packard, Palo Alto, California, USA, and analyzed using Image-Pro software from Media Cybernetics, Silver Springs, Maryland, USA. These changes do not significantly alter any results.

The apertured film was coated with Polysorbate 20 (TWEEN 20, available from ICI, Atlas Chemical Division, of Wilmington, Delaware, USA, by applying a fine spray of a solution formed of 1 part TWEEN 20 dissolved in 2 parts (v/v) isopropyl alcohol, and it was slit to a width of about 47 mm. TWEEN 20 was applied to the film substrate at ambient temperature of about 20 C with a target coating weight of about 1 wt-%. The coating weight is measured based upon the TWEEN 20 as the alcohol solvent volatilizes. This is described in greater detail in commonly assigned, co-pending application US Ser. No., _____, filed June __, 1999, entitled "Tampon with Cover and Nonionic Surfactant" (Attorney Docket PPC-708).

The slit film was cut to form a cover having a length of about 125 mm. The cover is applied to an absorbent web comprising 75 wt-% rayon and 25 wt-% cotton having a length of about 235 mm, a width of about 50 mm and a target weight of about 2.7 g. The cover was heat sealed to one end of the absorbent web in a manner generally described in US Ser. No. _____, filed June __, 1999, entitled "Sealing Roller and Sealing Roller Element, Particularly for Producing a Tampon for Feminine Hygiene and Method Therefore" (Attorney Docket, J&J-1819), and copending application US Ser. No. _____, filed June __, 1999, entitled "Continuous Method of Providing Individual Sheets from a Continuous Web" (Attorney Docket, PPC-668). The covered web was then compressed in a tampon press, as generally described in Friese et al., US Ser. No. 07/596,454, filed October 12, 1990, and EP-B-0 422 660. The resulting tampons had a weight of between 2.55 and 3.2 g. During processing of this film, it was noted that the cover was heat-sealable without blocking the apertures and without melting them through, and that the heat-sealable apertured film did not adhere to the aperturing drum.

The disclosures of all US patents and patent applications, as well as any corresponding published foreign patent applications, mentioned throughout this patent application are hereby incorporated by reference herein.

The specification and embodiments above are presented to aid in the complete and non-limiting understanding of the invention disclosed herein. Since many variations and embodiments of the invention can be made without departing from its spirit and scope, the invention resides in the claims hereinafter appended.

5

PPC-691

WHAT IS CLAIMED IS:

1. A wrapping element useful in absorbent articles comprising fluid-impervious plastic material in the form of a resilient three-dimensional web exhibiting a fiber-like appearance and tactile impression, the fluid-impervious plastic material comprises a laminate having at least three layers:

a) a first layer, forming a first outer surface of the laminate, comprising a blend of at least two thermoplastic polymeric components, a continuous phase of a first thermoplastic polymeric component that exhibits a first melting point temperature and a dispersed phase of an immiscible, second thermoplastic polymeric component that exhibits a second melting point temperature, less than the first melting point temperature, such that when the web is heated to a temperature between the first melting point temperature and the second melting point temperature, the second thermoplastic polymeric component is capable of forming an adhesive bond;

b) a second layer forming a second outer surface of the laminate, opposite the first outer surface; and

c) at least one intermediate layer, disposed between the first and second layers, wherein the web has first and second surfaces, the first surface being defined at least in part by the either of

the first and second layers and having a multiplicity of apertures therein, each of the apertures being defined by a multiplicity of intersecting fiber-like elements interconnected to one another substantially in the plane of the first surface, each of the fiber-like elements exhibiting a cross-section comprising a base portion in the plane of the first surface and a sidewall portion joined to each edge of the base portion, the sidewall portions extending generally in the direction of the second surface of the web, the intersecting sidewall portions being interconnected to one another intermediate the first and the second surfaces of the web, the interconnected sidewall portions terminating substantially concurrently with one another in the plane of the second surface.

2. The wrapping element of claim 1 wherein the first thermoplastic polymeric component is selected from the group consisting of polyolefins, polyesters, polyamides, polyurethanes, polystyrenes, halogenated polymers, and copolymers thereof.

3. The wrapping element of claim 2 wherein the first thermoplastic polymeric component comprises a polyolefin.

4. The wrapping element of claim 1 wherein the second thermoplastic polymeric component is selected

from the group consisting of polyolefins, polyesters, polyamides, polyurethanes, polystyrenes, halogenated polymers, and copolymers thereof.

5 5. The wrapping element of claim 4 wherein the second thermoplastic polymeric component comprises a polyolefin.

10 6. The wrapping element of claim 1 wherein the difference between the first melting point temperature and the second melting point temperature is greater than about 20° C.

15 7. The wrapping element of claim 1 wherein the first layer comprises about 45 to about 95 wt-% of the thermoplastic polymeric component and about 55 to about 5 wt-% of the second thermoplastic polymeric component.

20 8. The wrapping element of claim 7 wherein the first layer comprises about 60 to about 80 wt-% of the thermoplastic polymeric component and about 40 to about 20 wt-% of the second thermoplastic polymeric component.

25 9. The wrapping element of claim 1 wherein the first layer further comprises one or more components selected from the group comprising antioxidants, UV absorbers, lubricants, antiblock agents, slip agents,

plasticizers, nucleating agents, antistatic agents,
flame retardants, pigments, dyes, and fillers.

5 10. The wrapping element of claim 1 wherein the
second layer comprises a component selected from the
group consisting of polyolefins, polyesters, polyamides,
polyurethanes, polystyrenes, halogenated polymers, and
copolymers thereof.

10 11. The wrapping element of claim 1 wherein the
second layer comprises a blend of at least two
thermoplastic polymeric components, a continuous phase
of a first thermoplastic polymeric component that
exhibits a first melting point temperature and a
15 dispersed phase of an immiscible, second thermoplastic
polymeric component that exhibits a second melting point
temperature, less than the first melting point
temperature, such that when the web is heated to a
temperature between the first melting point temperature
20 and the second melting point temperature, the second
thermoplastic polymeric component is capable of forming
an adhesive bond;

25 12. The wrapping element of claim 11 wherein the
first thermoplastic polymeric component of the second
layer is selected from the group consisting of
polyolefins, polyesters, polyamides, polyurethanes,

polystyrenes, halogenated polymers, and copolymers thereof.

13. The wrapping element of claim 12 wherein the
5 first thermoplastic polymeric of the second layer
component comprises a polyolefin.

14. The wrapping element of claim 11 wherein the
10 second thermoplastic polymeric component of the second
layer is selected from the group consisting of
polyolefins, polyesters, polyamides, polyurethanes,
polystyrenes, halogenated polymers, and copolymers
thereof.

15. The wrapping element of claim 14 wherein the
15 second thermoplastic polymeric component of the second
layer comprises a polyolefin.

16. The wrapping element of claim 11 wherein the
20 difference between the first melting point temperature
and the second melting point temperature of the
components of the second layer is greater than about
20° C.

17. The wrapping element of claim 11 wherein the
25 second layer comprises about 45 to about 95 wt-% of the
thermoplastic polymeric component and about 55 to about
5 wt-% of the second thermoplastic polymeric component.

18. The wrapping element of claim 17 wherein the second layer comprises about 60 to about 80 wt-% of the thermoplastic polymeric component and about 40 to about 20 wt-% of the second thermoplastic polymeric component.

19. The wrapping element of claim 11 wherein the first and second layers are substantially identical.

20. The wrapping element of claim 1 wherein the intermediate layer comprises a component selected from the group consisting of polyolefins, polyesters, polyamides, polyurethanes, polystyrenes, halogenated polymers, and copolymers thereof.

21. The wrapping element of claim 20 wherein the intermediate layer comprises a polyolefin or a polyolefin copolymer.

22. The wrapping element of claim 21 wherein the intermediate layer comprises a blend of polyethylene and ethylene-vinyl acetate copolymer.

23. The wrapping element of claim 1 wherein the intermediate layer further comprises one or more components selected from the group comprising antioxidants, UV absorbers, lubricants, antiblock agents, slip agents, plasticizers, nucleating agents,

antistatic agents, flame retardants, pigments, dyes, and fillers.

5 24. The wrapping element of claim 23 wherein the intermediate layer comprises greater than about 5 wt-% of a pigment.

10 25. The wrapping element of claim 1 wherein the intermediate layer comprises a blend of polymeric materials.

15 26. The wrapping element of claim 25 wherein the intermediate layer comprises a blend of about 45 to about 99 wt-% of a first polymeric component and about 1 to about 55 wt-% of a second polymeric component.

27. The wrapping element of claim 1 which further comprises an additional intermediate layer.

20 28. The wrapping element of claim 1 wherein the first surface of the web is defined, at least in part, by the first layer of the laminate.

25 29. A tampon comprising an absorbent structure substantially enclosed by a cover wherein (1) the cover comprises fluid-impervious plastic material in the form of a resilient three-dimensional web exhibiting a fiber-like appearance and tactile impression, (2) the fluid-

impervious plastic material comprises a laminate having at least three layers:

5 a first layer, forming a first outer surface of the laminate, comprising a blend of at least two thermoplastic polymeric components, a continuous phase of a first thermoplastic polymeric component that exhibits a first melting point temperature and a dispersed phase of an immiscible, second thermoplastic polymeric component that exhibits a
10 second melting point temperature, less than the first melting point temperature, such that when the web is heated to a temperature between the first melting point temperature and the second melting point temperature, the second thermoplastic polymeric component is capable of forming an
15 adhesive bond;

a second layer forming a second outer surface of the laminate, opposite the first outer surface; and at least one intermediate layer, disposed between
20 the first and second layers; and

(3) the web has first and second surfaces, the first surface being defined at least in part by the first layer and having a multiplicity of apertures therein, each of the apertures being defined by a multiplicity of intersecting fiber-like elements interconnected to one
25 another substantially in the plane of the first surface, each of the fiber-like elements exhibiting a cross-section comprising a base portion in the plane of the

first surface and a sidewall portion joined to each edge of the base portion, the sidewall portions extending generally in the direction of the second surface of the web, the intersecting sidewall portions being interconnected to one another intermediate the first and the second surfaces of the web, the interconnected sidewall portions terminating substantially concurrently with one another in the plane of the second surface.

30. The tampon of claim 29 wherein the first thermoplastic polymeric component is selected from the group consisting of polyolefins, polyesters, polyamides, polyurethanes, polystyrenes, halogenated polymers, and copolymers thereof.

31. The tampon of claim 30 wherein the first thermoplastic polymeric component comprises a polyolefin.

32. The tampon of claim 29 wherein the second thermoplastic polymeric component is selected from the group consisting of polyolefins, polyesters, polyamides, polyurethanes, polystyrenes, halogenated polymers, and copolymers thereof.

33. The tampon of claim 32 wherein the second thermoplastic polymeric component comprises a polyolefin.

34. The tampon of claim 29 wherein the difference between the first melting point temperature and the second melting point temperature is greater than about 20° C.

35. The tampon of claim 29 wherein the first layer comprises about 45 to about 95 wt-% of the thermoplastic polymeric component and about 55 to about 5 wt-% of the second thermoplastic polymeric component.

36. The tampon of claim 29 wherein the second layer comprises a blend of at least two thermoplastic polymeric components, a continuous phase of a first thermoplastic polymeric component that exhibits a first melting point temperature and a dispersed phase of an immiscible, second thermoplastic polymeric component that exhibits a second melting point temperature, less than the first melting point temperature, such that when the web is heated to a temperature between the first melting point temperature and the second melting point temperature, the second thermoplastic polymeric component is capable of forming an adhesive bond;

37. The tampon of claim 36 wherein the first thermoplastic polymeric component of the second layer is selected from the group consisting of polyolefins,

polyesters, polyamides, polyurethanes, polystyrenes,
halogenated polymers, and copolymers thereof.

5 38. The tampon of claim 37 wherein the first
thermoplastic polymeric of the second layer component
comprises a polyolefin.

10 39. The tampon of claim 36 wherein the second
thermoplastic polymeric component of the second layer is
selected from the group consisting of polyolefins,
polyesters, polyamides, polyurethanes, polystyrenes,
halogenated polymers, and copolymers thereof.

15 40. The tampon of claim 39 wherein the second
thermoplastic polymeric component of the second layer
comprises a polyolefin.

20 41. The tampon of claim 36 wherein the difference
between the first melting point temperature and the
second melting point temperature of the components of
the second layer is greater than about 20° C.

25 42. The tampon of claim 36 wherein the second
layer comprises about 45 to about 95 wt-% of the
thermoplastic polymeric component and about 55 to about
5 wt-% of the second thermoplastic polymeric component.

43. The tampon of claim 36 wherein the first and second layers are substantially identical.

5 44. The tampon of claim 29 wherein the intermediate layer comprises a component selected from the group consisting of polyolefins, polyesters, polyamides, polyurethanes, polystyrenes, halogenated polymers, and copolymers thereof.

10 45. The tampon of claim 44 wherein the intermediate layer comprises a polyolefin or a polyolefin copolymer.

15 46. The tampon of claim 45 wherein the intermediate layer comprises a blend of polyethylene and ethylene-vinyl acetate copolymer.

20 47. The tampon of claim 29 wherein the intermediate layer further comprises one or more components selected from the group comprising antioxidants, UV absorbers, lubricants, antiblock agents, slip agents, plasticizers, nucleating agents, antistatic agents, flame retardants, pigments, dyes, and fillers.

25 48. The tampon of claim 47 wherein the intermediate layer comprises greater than about 5 wt-% of a pigment.

49. The tampon of claim 29 wherein the intermediate layer comprises a blend of polymeric materials.

5

50. The tampon of claim 49 wherein the intermediate layer comprises a blend of about 45 to about 99 wt-% of a first polymeric component and about 1 to about 55 wt-% of a second polymeric component.

10

51. The tampon of claim 29 which further comprises an additional intermediate layer.

15

52. A method of forming a wrapping element useful in absorbent articles, comprising the steps of:

forming a laminate having at least three layers having

20

a first layer, forming a first outer surface of the laminate, comprising a blend of at least two thermoplastic polymeric components, a continuous phase of a first thermoplastic polymeric component that exhibits a first melting point temperature and a dispersed phase of an immiscible, second thermoplastic polymeric component that exhibits a second melting point temperature, less than the first melting point temperature, such that when the web is heated to a temperature between the

25

first melting point temperature and the second melting point temperature, the second thermoplastic polymeric component is capable of forming an adhesive bond;

5 a second layer forming a second outer surface of the laminate, opposite the first outer surface; and

at least one intermediate layer, disposed between the first and second layers;

10 applying fluid at a temperature greater than ambient temperature to the laminate while it is supported on a three-dimensional surface to form a resilient three-dimensional web exhibiting a fiber-like appearance and tactile impression, wherein the web has first and second surfaces, the first surface being defined at least in part by the
15 either of the first and second layers and having a multiplicity of apertures therein, each of the apertures being defined by a multiplicity of intersecting fiber-like elements interconnected to
20 one another substantially in the plane of the first surface, each of the fiber-like elements exhibiting a cross-section comprising a base portion in the plane of the first surface and a sidewall portion
25 joined to each edge of the base portion, the sidewall portions extending generally in the direction of the second surface of the web, the intersecting sidewall portions being interconnected

to one another intermediate the first and the second surfaces of the web, the interconnected sidewall portions terminating substantially concurrently with one another in the plane of the second surface.-dimensional web exhibiting a fiber-like appearance and tactile impression; and separating the web into individual pieces of material of a size appropriate for a wrapping element.

53. The method of claim 52 wherein the step of forming the laminate comprises extruding thermoplastic polymeric components through an extruder.

54. The method of claim 53 wherein the first and second layers are extruded together to envelope the intermediate layer.

55. A method of making a tampon comprising the steps of:

separating a cover from a supply of a resilient three-dimensional web exhibiting a fiber-like appearance and tactile impression,

the web comprising fluid-impervious plastic material which comprises a laminate having at least three layers:

a first layer, forming a first outer surface of the laminate, comprising a

blend of at least two thermoplastic
polymeric components, a continuous phase
of a first thermoplastic polymeric
component that exhibits a first melting
point temperature and a dispersed phase
of an immiscible, second thermoplastic
polymeric component that exhibits a
second melting point temperature, less
than the first melting point temperature,
such that when the web is heated to a
temperature between the first melting
point temperature and the second melting
point temperature, the second
thermoplastic polymeric component is
capable of forming an adhesive bond;
a second layer forming a second outer
surface of the laminate, opposite the
first outer surface, comprising a blend
of at least two thermoplastic polymeric
components, a continuous phase of a first
thermoplastic polymeric component that
exhibits a first melting point
temperature and a dispersed phase of an
immiscible, second thermoplastic
polymeric component that exhibits a
second melting point temperature, less
than the first melting point temperature,
such that when the web is heated to a

temperature between the first melting
point temperature and the second melting
point temperature, the second
thermoplastic polymeric component is
capable of forming an adhesive bond; and
at least one intermediate layer, disposed
between the first and second layers; and
the web has first and second surfaces, the
first surface being defined at least in part
by the first layer and having a multiplicity
of apertures therein, each of the apertures
being defined by a multiplicity of
intersecting fiber-like elements
interconnected to one another substantially in
the plane of the first surface, each of the
fiber-like elements exhibiting a cross-section
comprising a base portion in the plane of the
first surface and a sidewall portion joined to
each edge of the base portion, the sidewall
portions extending generally in the direction
of the second surface of the web, the
intersecting sidewall portions being
interconnected to one another intermediate the
first and the second surfaces of the web, the
interconnected sidewall portions terminating
substantially concurrently with one another in
the plane of the second surface;

substantially enclosing an absorbent structure with
the cover; and
applying thermal energy to the cover to heat it to
a temperature between the first melting point
temperature and the second melting point
temperature of the first layer to form an adhesive
bond.

5

Abstract of the Disclosure

A multilayered apertured film wrapping element for an absorbent article is disclosed. At least one outer layer of the fluid-impervious plastic material has a continuous phase of a thermoplastic polymeric component and an immiscible, dispersed phase of a thermoplastic polymeric component having a lower melting point. The wrapping element is useful in applications involving heat sealing and similar thermal processes in absorbent articles, such as sanitary napkins, diapers, bandages, tampons, and the like.

FIG. 1

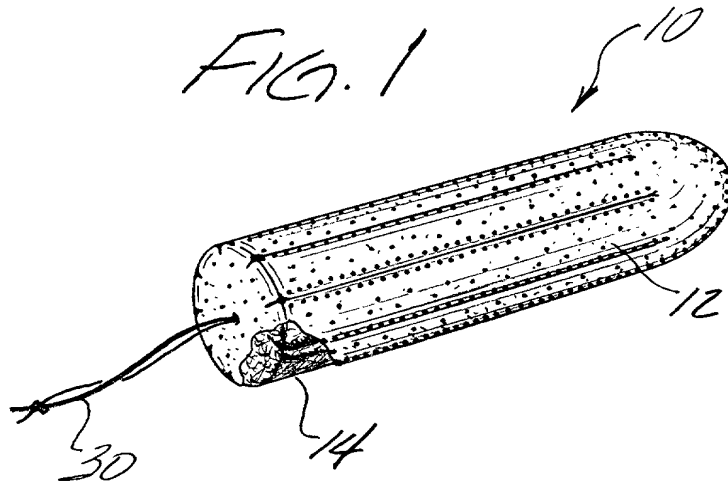


FIG. 2


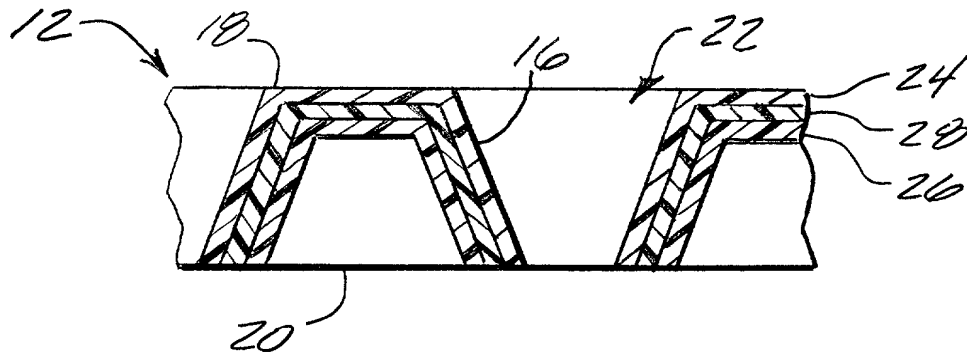


FIG. 3

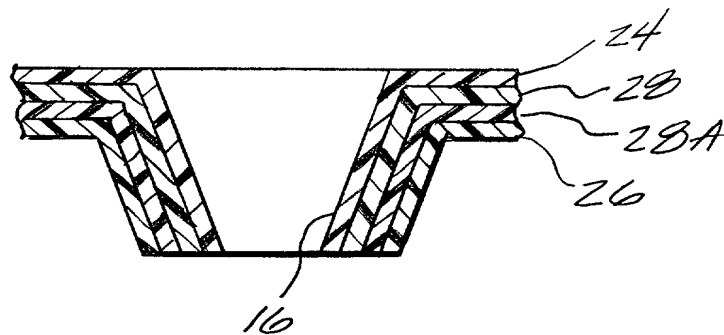

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **MULTILAYERED APERTURED FILM WRAPPING ELEMENT FOR ABSORBENT ARTICLES**, the specification of which

(check one) ☒ is attached hereto.

☐ was filed on _____ as

Application Serial No. _____

and was amended on _____.
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s):

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119	
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.

Filing Date

Status

Application Serial No.

Filing Date

Status

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith as well as to file equivalent patent applications in countries foreign to the United States including the filing of international patent applications in accordance with the Patent Cooperation Treaty: Audley A. Ciamporzero, Jr. (Reg. #26,051), Steven P. Berman (Reg. #24,772), Andrea L. Colby (Reg. #30,194), Michael Stark (Reg. #32,495), and Joel A. Rothfus (Reg. #33,277) One Johnson & Johnson Plaza, New Brunswick, NJ 08933.

Address all telephone calls to Joel A. Rothfus at telephone no.
(732) 524-2722.

Address all correspondence to Audley A. Ciamporzero, Jr., One
Johnson & Johnson Plaza, New Brunswick, NJ 08933-7003.

I hereby declare that all statements made herein of my own
knowledge are true and that all statements made on information
and belief are believed to be true; and further that these
statements were made with the knowledge that willful false
statements and the like so made are punishable by fine or
imprisonment, or both, under Section 1001 of Title 18 of the
United States Code and that such willful false statements may
jeopardize the validity of the application or any patent issued
thereon.

Inventor's Signature: _____

Full Name of Sole
or First Inventor

Bruce C. Johnson

Date: _____

Citizenship: U.S.

Residence: 2001 Bayonne Avenue, Whiting, NJ 08759

Post Office Address: Same as above

Inventor's Signature: _____

Full Name of Second Joint
Inventor, If Any

Judith Roller

Date: _____

Citizenship: U.S.

Residence: 9 Quince Place, North Brunswick, NJ 08902

Post Office Address: Same as above

Inventor's Signature: _____

Full Name of Third Joint
Inventor, If Any

Date: _____

Citizenship:

Residence:

Post Office Address:

(Supply similar information and signature for fourth and
subsequent joint inventors.)